



FLORIDA PRODUCT APPROVAL

MIAMI SERIES (1.75 SNAP LOCK ALUM)
.032 ALUM – 14" width ROOF PANEL OVER 15/32" PLYWOOD
FLORIDA PRODUCT APPROVAL NO 21423.4

Product Evaluation Report

1.75 Snap Lock Aluminum Roof Panel over 15/32" Plywood

Florida Product Approval #21423.4

Florida Building Code 2017 6th ed., Per Rule 61G20-3

Method: 1 –D

Category: Roofing Subcategory: Metal Roofing Compliance Method:

Rule 61G20-3

HVHZ

Product Manufacturer:

Sunlast Metal
2120 SW Poma Drive
Palm City, Florida 34990

Engineer Evaluator

Diane G. Marotta, P.E. reg #82591


1915 NE 45th ST. #107
Fort Lauderdale, FL 33308
954-776-8004

Validator:

Locke Bowden, P.E., FL #49704
9450 Alysburry Place
Montgomery, AL 36117

Evaluation Report 1-4

Diane G. Marotta, P.E.
FL reg. # 82591
seal

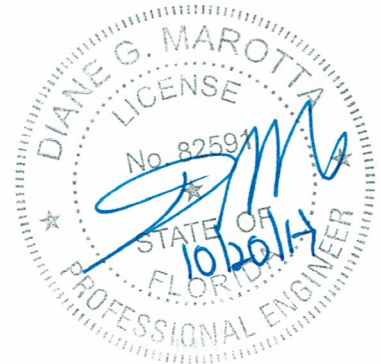

Compliance Statement: The product as described in this report has demonstrated compliance with the Florida Building Code 2017, Sections 1504.3.2, 1507.1.1, 1507.4.3, 1518.9, 1523.6.5.2.4

Product Description: .032 ALUM Panel, 14" Width Roof panels, 1.75" Rib height

Panel restrained with .050 Galvanized steel clips; 3-1/2" length into 15/32" APA Plywood decking.
Non-structural Application.
FOR USE IN HVHZ.

Material: .032 ALUM metal conforming to Florida Building Code 2017 Section 1507.4.3

Corrosion Resistance: Panel Material shall comply with Florida Building Code 2017, Section 1507.4.3, 1517.6 for HVHZ

Panel Dimensions: Panel Width: 14" width

Fastener: #10 X 1" Pancake-Head wood fasteners or equivalent. Corrosion Resistant per Florida Building Code 2017 Section 1506.7. 3/16" minimum penetration through plywood

Corrosion Resistance: Per Florida Building Code 2017, Section 1506.6, 1507.4.4

15/32" APA plywood, plywood supports at maximum 24' O.C. Design of plywood and plywood supports are outside the scope of this evaluation. Must be designed in accordance w/ Florida Building Code 2017.

Clip: .050 Galvanized steel, 3-1/2" long per FBC sec. 1506.7

TABLE A Safety factor of included		
Design Pressures	Field	Perimeter/Corner
Max Design Pressure	-110.5psf	-114.25psf
Fastener Spacing	12" o.c.	6" o.c.
Fastener Size	#10	# 10

Insulation: Optional Rigid Insulation board, 3" max thickness compliant with FBC 2017 section 1508.2

Quality Assurance: In accordance with FBC 2017 and Rule # 61620-3: Keystone Certification, Inc. QUA 1824

Test References:

- Architectural Testing Inc (TST 1527) # 0412-01012-06TAS 125-2003
- PRI Construction Material Technologies(TST5878) SFMS-003-02-01 TAS 100-1995
- PRI Construction Material Technologies(TST5878) AKZC-001-02-01/05 TAS 110-2000
- PRI Construction Material Technologies(TST5878)AKZO-001-02-01/05 ASTM B 117-2002
- AKZO Nobel Coatings, Inc. Lab Form ASTM G 153

Code Compliance:

The product described herein demonstrated compliance with The Florida Building Code (FBC) 2017 Section 1504.3.2, 1523.6.5.2.4.1. The product evaluation is limited to compliance with the structural wind load requirements of the FBC 2017, as relates to Rule **61G20-3**.

Minimum Slope Range 2/12 Minimum Slope per Florida Building Code 2017, and in accordance with Manufacturers recommendations.

Installation: Install per manufacturer's recommended details in compliance with FBC 2017.

Underlayment: Per Manufacturer's installation guidelines per Florida Building Code 2017, Chapter 1507, Chart 1507.1.1

Roof Panel Fire Classification: No classification.

Shear Diaphragm: values are outside the scope of this report.

Design Procedure: Based on the dimensions of the structure, applicable wind loads are determined using Chapter 16 of the Florida Building Code 2017 - roof cladding wind loads. Component wind loads for roof cladding are compared to the allowable pressure listed above. Design professional shall select the applicable erection details to reference in drawings for correct fastener attachment to his structure and analyze the panel fasteners for pullout and pullover. Support framing must be compliant with Florida Building Code 2017 Chapter 22 for steel, Chapter 23 for wood and Chapter 16 for structural loading. Required wind loads shall be determined per project per FBC 2017 and any rational analysis computation shall be prepared by a licensed design professional.


Certificate of Independence: Diane G. Marotta, P.E. does not have nor will acquire financial interest in any company manufacturing or distributing products under this evaluation. Diane G. Marotta, P.E. is not owned or operated or controlled by any company manufacturing or distributing product under this report.

MIAMI SERIES (1.75 SNAP LOCK ALUM)

INSTALL DETAILS

Fastener: # 10 Pancake Head Wood Fastener

TYPICAL ASSEMBLY PROFILE VIEW

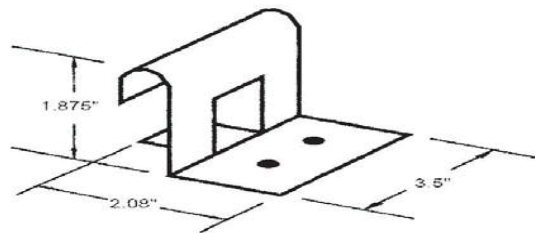

TYPICAL ASSEMBLY ISOMETRIC VIEW

